


THE FD 8100 DOOR

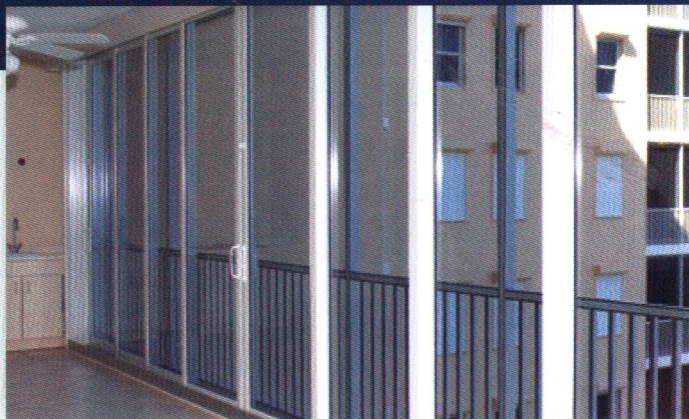

Specifications:

Maximum Size	32' x 10', 40' x 9'
AAMA/NWDA170	101/I.S.2.-A440-05
ASTM	1886-1996 MD201202203
Muntin	Flat
Grid Options	Colonial, Prairie, Perimeter
Product Rating	C110
HVHZ Approval	Yes
Frame Colors	White, Bronze

Frame/Track Sizes:

	Head	Jamb	Sill
2D2T w/ screen	6 3/8"	6 1/4"	7 1/16"
2D2T no screen	5 3/16"	5 1/16"	5 13/16"
2D2T retro	5 3/16"	5 1/16"	5 3/16"
3D3T with screen	8 7/8"	8 5/8"	9 1/2"
3D3T no screen	7 1/16"	7 1/2"	8 3/8"
4D4T no screen	10 3/16"	9 15/16"	10 13/16"

Riser for Track:

Standard:	1 3/4"
Add-On: 1"	2 3/4"
Add-On: 2 3/16"	3 15/16"

Glass Thickness:

1/4" Tempered	1/2" Impact	9/16" Impact
1" Insulated	1 1/16" Insulated Impact	

(Must Specify Standard or Reverse System)

Standard Items Included:

- Dual Mortise Lock w/Anti-Slam Device
- Stainless Steel Dual Tandem Rollers with Precision Ground Bearings
- Adjustable Dual Cams on Lock
- Weep Holes in Track
- 2-point Locking System
- Anodized Track Pan w/ Snap on Cover
- Snap on Jamb Covers
- 4" Sill on Panel

Extra Items Available:

- Secondary Lock (Standard on 8' or taller panels)
- 8" Panel Sill
- Colonial Muntins
- Anodized Track Cap (available only with 0 panels)
- 2 Piece Screen Adapter (available only with OXO & OXXO systems)
- Available in 90° or 135° Configurations

The most versatile impact sliding glass door
for most residential & commercial installations

